



# CLADDING

OUGLAS FIR 28x145 UYS

4321



lauta.fi/4321

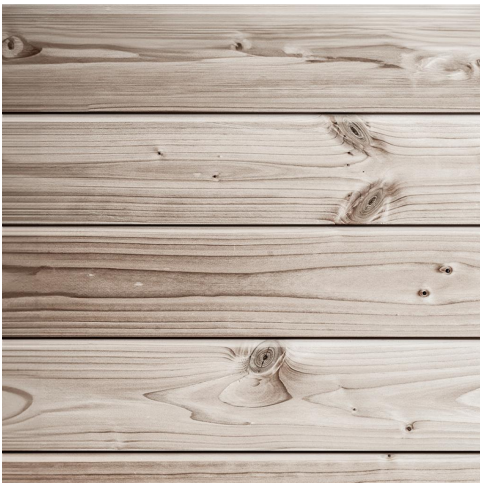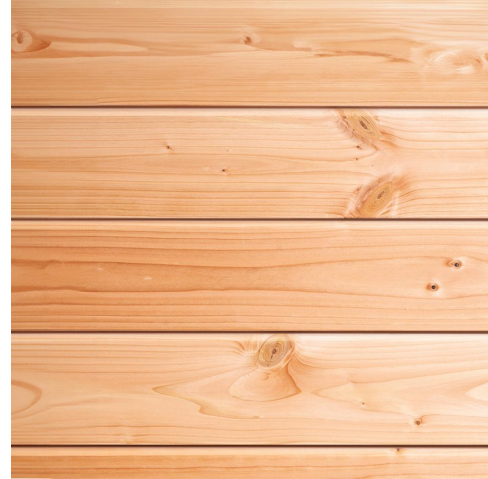

## Introduction

- ✓ Responsibly made
- ✓ Completely natural and safe product
- ✓ Rich in color and weathers to an elegant grey
- ✓ Naturally strong and highly rot-resistant
- ✓ No surface treatment needed for outdoor use, almost maintenance-free
- ✓ Raw material from PEFC-certified sources

## Product description

---

- ✓ Responsibly manufactured in Lempäälä
- ✓ Completely natural and safe product
- ✓ Colorful with subtle variations, weathers to an elegant gray
- ✓ Naturally strong and highly rot-resistant
- ✓ No surface treatment needed for outdoor use, nearly maintenance-free
- ✓ Raw material from PEFC-certified sources

Our product uses Douglas fir, a naturally highly rot-resistant softwood. Its subtly reddish tones gradually develop into a beautiful silver-gray with exposure to the elements. Strong and durable, Douglas fir requires no surface treatment outdoors and is almost maintenance-free. Our Douglas fir products are responsibly produced, environmentally friendly, and sourced from PEFC-certified forests.

## Product information

### Product information

Tuotenimi	ULKOVERHOUS DOUGLASKUUSI 28x145 UYS
Tuotenumero	4321
Alkuperämaa	Suomi
Saatavuus	le yhteydessä myyntiin
CN-koodi	Douglas Fir - Profiled - CN 4409 1018

### Product measurements

Vahvuus (mm)	28
Leveys (mm)	145
Paino (kg/myyntiyksikkö)	2,257
Neliömenekki (m/m <sup>2</sup> )	7,4
Hyötyleveys (mm)	135

### Product features

Puulaji	Douglaskuusi
Pintakäsittely	Käsittelemätön
Palokäyttäytyminen	D-s2, d0

### Sustainability

CE-merkintä	Kyllä
-------------	-------

Please note that we deliver our products in bundles. Bundle size is indicated together with stock information on top right corner.

## Installation and storage

---

### Storage of Outdoor Products

- Products should be protected from direct sunlight and rain before installation.
- Products should be stored horizontally on a flat surface, in unopened packages, and elevated at least 75 mm from the ground so that air can circulate underneath the stack.
- Sunlight and moisture together can cause boards to start graying in spots even before installation; if this happens, the color will even out after installation.

## Sample pieces

---

Lauta.fi delivers product sample pieces to both consumer customers and professionals, such as architects, interior architects and designers, construction industry and procurement professionals.

If you are interested in ordering one or more sample pieces, please contact our sales department via email [lauta@lauta.fi](mailto:lauta@lauta.fi) or phone [+358 3 3123 6000](tel:+358331236000) (On weekdays 8-16).